



# DODGE SPRINTER EXTERIOR DIMENSIONS

## MEGA ROOF

2500  
116.7" CARGO VAN  
(170" WB)  
3500  
120.1" CARGO VAN  
(170" EXT)




## 170" WHEELBASE WITH EXTENDED BODY

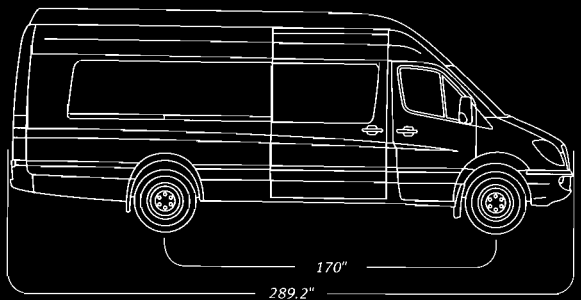


## HIGH ROOF

2500 CARGO  
107.5" CARGO VAN  
(144", 170" WB AND 170" EXT)  
107.5" PASSENGER VAN  
(144" AND 170" WB)  
3500  
107.5" CARGO VAN  
(144", 170" WB AND 170" EXT)




## 170" WHEELBASE

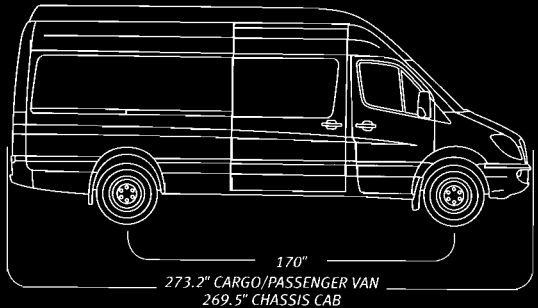

## STANDARD ROOF

2500  
96.3" CARGO VAN/  
PASSENGER VAN  
(144" WB)  
3500  
95.5" CHASSIS CAB  
(144" AND 170" WB)



## 144" WHEELBASE



### ENGINE

#### 3.0L V6 CRD TURBO DIESEL

Configuration	6-cylinder V-design
Horsepower	154 @ 3,400 rpm
Torque	280 @ 1,200-2,400 rpm
Displacement (cu in)	182
Bore (in)	3.26
Stroke (in)	3.62
Compression ratio	18 to 1
Number of valves	24
Intake system	Turbocharged with intercooler
Fuel system	CRD (Common Rail Diesel)
Emissions	50 state
Oil Change Interval (under normal operation)	10,000 miles

#### 3.5L V6 GASOLINE ENGINE

Configuration	6-cylinder V-design
Horsepower	254 @ 5,900 rpm
Torque	250 @ 2,500-5,000 rpm
Displacement (cu in)	213
Bore (in)	3.66
Stroke (in)	3.39
Compression ratio	10.7 to 1
Number of valves	24
Intake system	Naturally aspirated
Fuel system	Electronic Fuel Injection
Emissions	50 state
Oil Change Interval (under normal operation)	10,000 miles

### STEERING

Type	Speed-sensitive rack-and-pinion power steering
Number of Turns Lock-to-Lock	3.3

### ELECTRICAL

Battery	100-amp/hour
Alternator	180-amp std (220-amp available)

### TRANSMISSION

Type	5-speed automatic with AutoStick*	
PTO capability	No	
Gear ratios	1st	3.59 to 1
	2nd	2.19 to 1
	3rd	1.41 to 1
	4th	1.00 to 1
	5th	.83 to 1
	Rev.	3.16 to 1
Standard axle ratio (diesel)	3.92	
Standard axle ratio (gas)	4.72	
Optional axle ratio (diesel)	4.18	
Optional axle ratio (gas)	5.10	

### BRAKES

Type	4-wheel ABS hydraulic system with front and rear discs with Adaptive ESP <sup>SM</sup>
Rotors	300-mm front 298-mm rear (2500)
	300-mm front 303-mm rear (3500)
Booster	Vacuum assisted
Calipers	Twin piston (front) Single piston (rear)
Parking brake	Drum in hat

<sup>SM</sup> Always drive carefully, consistent with conditions. Always wear your seat belt and obey traffic laws.

### FLUID CAPACITIES

	DIESEL	GAS
Standard fuel tank	25-gallon	25-gallon
Cooling system	10.75 quarts	7.4 quarts
Engine oil	13 quarts	10 quarts
Rear axle	4.0 pints	4.0 pints
Transmission fluid (service fill)	10.65 pints	10.65 pints

<sup>SM</sup> Normal refill capacities are shown. A variation may be observed from vehicle to vehicle due to manufacturing tolerance and refill procedure.

### WHEELS/TIRES

Wheels	16" x 6.5" steel (2500)
	16" x 6.5" aluminum (available on 2500)
	16" x 5.5" steel (3500)
Tires	LT245/75R16 all-season tires (2500)
	LT215/85R16 all-season tires (3500)

These specifications have been provided to us by Chrysler Corporation llc at the time of this web site development and are believed to be accurate. Please check before depending on these figures for your individual purposes.

## DODGE SPRINTER DIMENSIONS AND SPECIFICATIONS

	CARGO VAN									PASSENGER VAN			CHASSIS CAB	
	2500 STANDARD ROOF	2500 HIGH ROOF			2500 MEGA ROOF	3500 HIGH ROOF			3500 MEGA ROOF	2500 STANDARD ROOF	2500 HIGH ROOF		3500	
Wheelbase Lengths (in)	144	144	170	170 w/ EXT	170	144	170	170 w/EXT	170 w/ EXT	144	144	170	144	170
Turning Diameter (ft)	47.6	47.6	54.6	54.6	54.6	47.6	54.6	54.6	54.6	47.6	47.6	54.6	47.6	54.6
Ground To Sliding Door Step - side (in)	20.2	20.2	19.9	19.9	19.9	22.0	21.2	21.2	21.2	20.2	20.2	19.9	—	—
Load Height - rear (in)	27.6	27.6	27.4	27.2	27.4	31.1	30.9	30.9	30.9	27.6	27.6	27.4	—	—
Door Opening Height— side (in)	59.8	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	59.8	71.7	71.7	—	—
Door Opening Height - rear (in)	60.6	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	60.6	72.4	72.4	—	—
Door Width - side (in)	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	—	—
Door Width - rear (in)	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	—	—
Cargo Bed Length (in)	128.5	128.5	169.3	185.0	169.3	128.5	169.3	185.0	185.0	32.5	32.5	73.2	—	—
Cargo Width at Wheelhouse (in)	53.1	53.1	53.1	53.1	53.1	38.5	38.5	38.5	38.5	53.1	53.1	53.1	—	—
Maximum Width at Floor (in)	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	—	—
Interior Height (in)	65.0	76.4	76.4	76.4	84.3	76.4	76.4	76.4	84.3	65.0	76.4	76.4	—	—
Loading Area (sq ft)	59.2	59.2	79.7	86.1	79.7	58.1	78.6	85.0	85.0	23.7	23.7	31.2	—	—
Cargo Volume (cu ft)	318	371	494	547	530	371	494	547	600	141.3	158.9	187.2	—	—
Standard GVWR (lb)	8,550	8,550	8,550	8,550	8,550	9,990	9,990	9,990	11,030	8,550	8,550	8,550	11,030	11,030
Maximum Available GVWR (lb)	—	—	—	—	—	11,030	11,030	11,030	—	—	—	—	—	—
Standard GAWR - front (lb)	3,970	3,970	3,970	3,970	3,970	4,080	4,080	4,080	4,080	3,970	3,970	3,970	4,080	4,080
Available GAWR - front (lb)	—	—	—	—	—	4,410	4,410	4,410	4,410	—	—	—	4,410	4,410
Standard GAWR - rear (lb)	5,360	5,360	5,360	5,360	5,360	7,060	7,060	7,060	7,720	5,360	5,360	5,360	7,720	7,720
Available GAWR - rear (lb)	—	—	—	—	—	7,720	7,720	7,720	—	—	—	—	—	—
Standard GCWR (lb)	13,550	13,550	13,550	13,550	13,550	14,990	14,990	14,990	15,250	13,550	13,550	13,550	15,250	15,250
Available GCWR	—	—	—	—	—	15,250	15,250	15,250	—	—	—	—	—	—
Tire Track (Front/Rear) (in)	68.0/68.2	68.0/68.2	68.0/68.2	68.0/68.2	68.0/68.2	67.2/60.9	67.2/60.9	67.2/60.9	67.2/60.9	68.0/68.2	68.0/68.2	68.0/68.2	67.2/60.9	67.2/60.9
Vehicle Length (in)	232.5	232.5	273.2	289.2	273.2	232.5	273.2	289.2	289.2	232.5	232.5	273.2	239.6	269.5
Vehicle Height (in)	96.3	107.5	107.5	107.5	116.7	107.5	107.5	107.5	120.1	96.3	107.5	107.5	95.5	95.5
Vehicle Width (in)	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.3	79.3
Front Overhang BA (in)	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5
Rear Overhang (in)	48.8	48.8	63.6	79.3	63.6	48.8	63.6	79.3	79.3	48.8	48.8	63.6	49.2	53.1
Cab to Body Clearance CB (in)	—	—	—	—	—	—	—	—	—	—	—	—	2.0	2.0
Frame Width (outside/pinched) (in)	—	—	—	—	—	—	—	—	—	—	—	—	39.188 / 30.250	39.188 / 30.250
Maximum Body Length BL (in/ft)	—	—	—	—	—	—	—	—	—	—	—	—	155.2 / 13.0	194.1 / 16.2
Maximum Body Width (in)	—	—	—	—	—	—	—	—	—	—	—	—	96.0	96.0
Front of Axle to Back of Cab AC (in)	—	—	—	—	—	—	—	—	—	—	—	—	59.1	59.1
Cab to Axle CA (in)	—	—	—	—	—	—	—	—	—	—	—	—	85.2	111.2

Rear Frame Overhang on Chassis Cab.

## DODGE SPRINTER MAXIMUM AVAILABLE PAYLOADS <sup>(1)</sup>

MODEL	WHEELBASE (INCHES)	ROOF VERSION	ENGINE/TRANSMISSION (3.0L DIESEL STANDARD • 3.5L GAS AVAILABLE)	AXLE RATIOS (STANDARD/AVAILABLE)	MAXIMUM TOWING (LB)	MAXIMUM TONGUE WEIGHT (LB)	MAXIMUM PAYLOAD/UPFIT (LB)	BASE CURB WEIGHT (LB)	LOAD VOLUME (CU FT)	GVWR	
2500	Cargo Van	144	Standard	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	3,766	4,784	318	8,550
				3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	3,839	4,711	318	8,550
	Cargo Van	144	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	3,614	4,936	371	8,550
				3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	3,760	4,790	371	8,550
	Cargo Van	170	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	3,283	5,267	494	8,550
				3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	3,428	5,122	494	8,550
	Cargo Van	170 EXT	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	3,155	5,395	547	8,550
				3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	3,301	5,249	547	8,550
	Cargo Van	170	Mega Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	3,224	5,326	530	8,550
				3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	3,369	5,181	530	8,550
	Passenger Van	144	Standard	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	2,937	5,613	141.3	8,550
				3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	3,082	5,468	141.3	8,550
	Passenger Van	144	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	2,858	5,692	158.9	8,550
				3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	3,003	5,547	158.9	8,550
Passenger Van	170	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	2,465	6,085	187.7	8,550	
			3.5L Gas / 5-spd Auto	4.72 / 5.10	5,000	500	2,610	5,940	187.2	8,550	
3500	Cargo Van	144	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	4,530	5,460	371	9,990
								5,570	5,460	371	11,030
	Cargo Van	170	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	4,128	5,862	494	9,990
								5,168	5,862	494	11,030
	Cargo Van	170 EXT	High Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	4,012	5,978	547	9,990
								5,052	5,978	547	11,030
	Cargo Van	170 EXT	Mega Roof	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	4,989	6,041	600	11,030
	Chassis Cab	144	Standard	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	6,543	4,487	—	11,030
	Chassis Cab	170	Standard	3.0L Diesel / 5-spd Auto	3.92 / 4.18	5,000	500	6,460	4,570	—	11,030

<sup>(1)</sup>When properly equipped.